



Accessories

Dry Run Protection

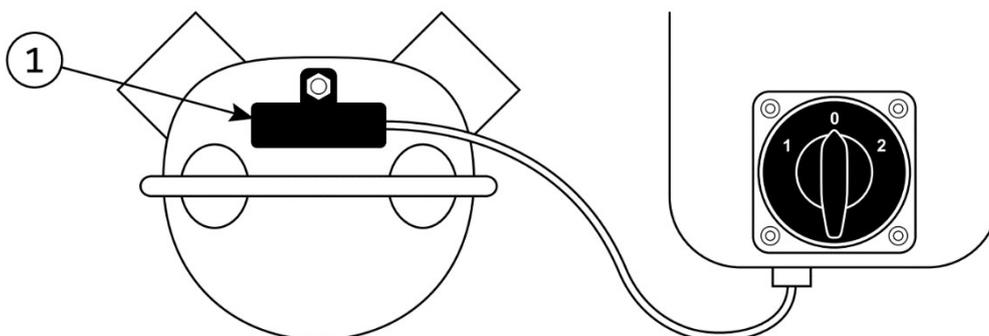

Dry Run Protection can be fitted to pump heads from MINOR sizes upwards. It is a temperature sensor which automatically stops the pump once it registers a temperature higher than 50°C within the pump head. For fluids being pumped higher than this temperature then sensors set at 70 & 90°C are available on request and need to be specified at order stage. Once the temperature in the pump head drops below the pre-set value the pump automatically starts back up.

By-Pass Valves

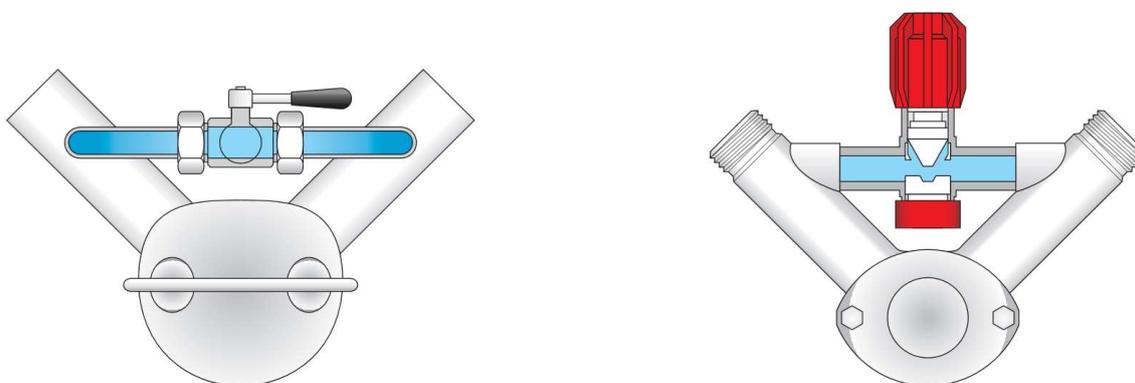

Manual and Spring Loaded By-Passes are available on all pumps can are ideal when the pump is being used with a discharge nozzle or there is the potential for Dead Head Operation.

Manual By-Passes: MINI, MAJOR, MAXI Pump Types
 Spring Loaded By-Passes: MIDEK & MINOR Pump Types

Hygienic Shrouds

- Hygienic Shrouds for use in food environments & Wash Down Areas
- Mounted to SS 316 Baseplates or Trolleys
- Trolleys are fitted with white Food Grade Wheels
- Trolley mounted units come with the standard CE Compliant Control Panel



Radio Controller

In addition to our extensive range of control panels we can also supply a Radio Controller for control of our Self-Priming Flexible Impeller Pumps at distance.

Automatic Barrel Filling Kit



The Automatic Barrel Filling Kit is an ideal solution for those who don't want to waste time in the cellar. It is compact, ergonomic and easy to use and doesn't come with complicated and bulky cabling due to its 12V rechargeable battery and signalling LED.

It is built entirely from Stainless Steel and comes with a wash down proof IP55 Control Box which enables quick and easy setting of desired filling levels.

There is also a sensitivity adjustment setting which can be used when pumping fluids with a high alcohol content and a response delay setting in case of foaming liquids.

Thanks to its compact design it is also perfectly suited for use with stacked barrels.



It is available with a wide range of customisable connections: Garolla, Macon, Din 11851, Tri-Clamp, BSP, SMS, BSM/RJT & Friederich.

Maximum capacity is 120 litres/minute at 0.7 bar & 210 litres/minute at 1.9 bar.

The kit includes the following:

- Stainless Steel Automatic Gun
- Non Return Valve
- Pressure Switch
- 30 mm ø fitting
- Hose for barrel emptying



IRR Centrifugal Sprinkler Kit



The IRR Centrifugal Sprinkler Kit rotates using the pressure of the feed pump and is available in 2 set sizes:

IRR 50: Suitable for pumps with a capacity from 100 – 225 hl/hr

IRR 65: Suitable for pumps with a capacity from 225 - 500 hl/hr

It provides a universal drizzling effect from the cap granting excellent colour leaching,

Standard fastenings are for 400 mm manways however larger dimensions are available on request.

